

Northumbria Research Link

Citation: Xu, Ben, Frozanpoor, Iman, Wang, Ding, Wells, Gary, Martin, James, Stuart-Cole, Simone, Wood, David and McHale, Glen (2015) Buckling induced surface morphology transition of drying polymer based droplet. In: The 6th International Workshop on Bubble and Drop Interfaces, 6 - 10 July 2015, Potsdam-Golm.

URL:

This version was downloaded from Northumbria Research Link:
<http://nrl.northumbria.ac.uk/23334/>

Northumbria University has developed Northumbria Research Link (NRL) to enable users to access the University's research output. Copyright © and moral rights for items on NRL are retained by the individual author(s) and/or other copyright owners. Single copies of full items can be reproduced, displayed or performed, and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided the authors, title and full bibliographic details are given, as well as a hyperlink and/or URL to the original metadata page. The content must not be changed in any way. Full items must not be sold commercially in any format or medium without formal permission of the copyright holder. The full policy is available online: <http://nrl.northumbria.ac.uk/policies.html>

This document may differ from the final, published version of the research and has been made available online in accordance with publisher policies. To read and/or cite from the published version of the research, please visit the publisher's website (a subscription may be required.)

www.northumbria.ac.uk/nrl



BUCKLING INDUCED SURFACE MORPHOLOGY TRANSITION OF DRYING POLYMER BASED DROPLET

Ben Xu¹, Iman Frozanpoor¹, Ding Wang¹, Gary Wells¹, James Martin², Simone Stuart-Cole², David Wood³, Glen McHale¹

- 1) *Smart Materials and Surfaces Lab*, Faculty of Engineering and Environment, Northumbria University, Newcastle upon Tyne, NE1 8ST, UK
E-mail: ben.xu@northumbria.ac.uk
- 2) *REECE INNOVATION*, Wincomblee Road, Walker, Newcastle upon Tyne, NE6 3QS, UK
- 3) *Microsystems Technology Group*, School of Engineering and Computing Sciences, Durham University, South Road, Durham, DH1 3LE, UK

Keywords: Buckling, droplet drying, morphology
Main Topic: Interfacial instabilities

Drying of complex liquids to form structural solids, as a conventional and cost-effective technique, has been widely used in the fabrication of many industrial products, such as membranes, bio-scaffolds, cell substrates and drug carriers. The challenge arising from this drying process is how to control the morphologies of the formed solids. The current strategy is to design and establish the desired surface chemical/physical equilibrium during the evaporation of the solvent, by adjusting the droplet ingredients and environmental conditions. Understanding of the process is based on the thermo-dynamic equilibrium of the surface/interface when forming the elastic shell and the mechanics of the subsequent shell deformation.

In this project, we are investigating the formation of the morphology and the transition/evolution in a Polyvinylpyrrolidone (PVP) based droplet. Our experiments consider various inputs such as chemical composition of the droplet, the solvent, the molecular weight of polymer, evaporation temperature and surface wettability. The morphology has been investigated using fluorescence microscopy and Laser Scanning Confocal Microscopy (LSCM). Figure 1 shows the controllable morphologies on a single droplet. There is a scaling relation between the time to the onset of buckling and initial geometries of the droplet. For drops with the same contact angle and concentration, $t_B \sim (1 - RH)^{-2}(V_0)^{2/3}$, where R is the radius, H is the height and V_0 is the initial volume of the droplet. In this study, the controllable morphology formation/transition are discussed in terms of a phase diagram as a function of the system variables. This provides an understanding of how to controllably form structures when drying a polymer droplet. These results have potential applications in the fabrication of bio-scaffolds.

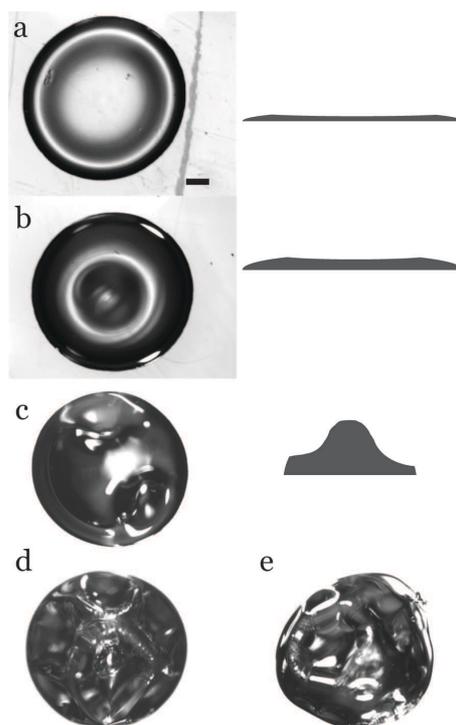


Figure 1. The controllable morphologies includes, a) pancake, b) deep pancake, c) double buckling, d) quadruple buckling, e) crumpling.

Acknowledgement: This work is supported by HEIF-CER funding and the University of Northumbria, and REECE INNOVATION.